
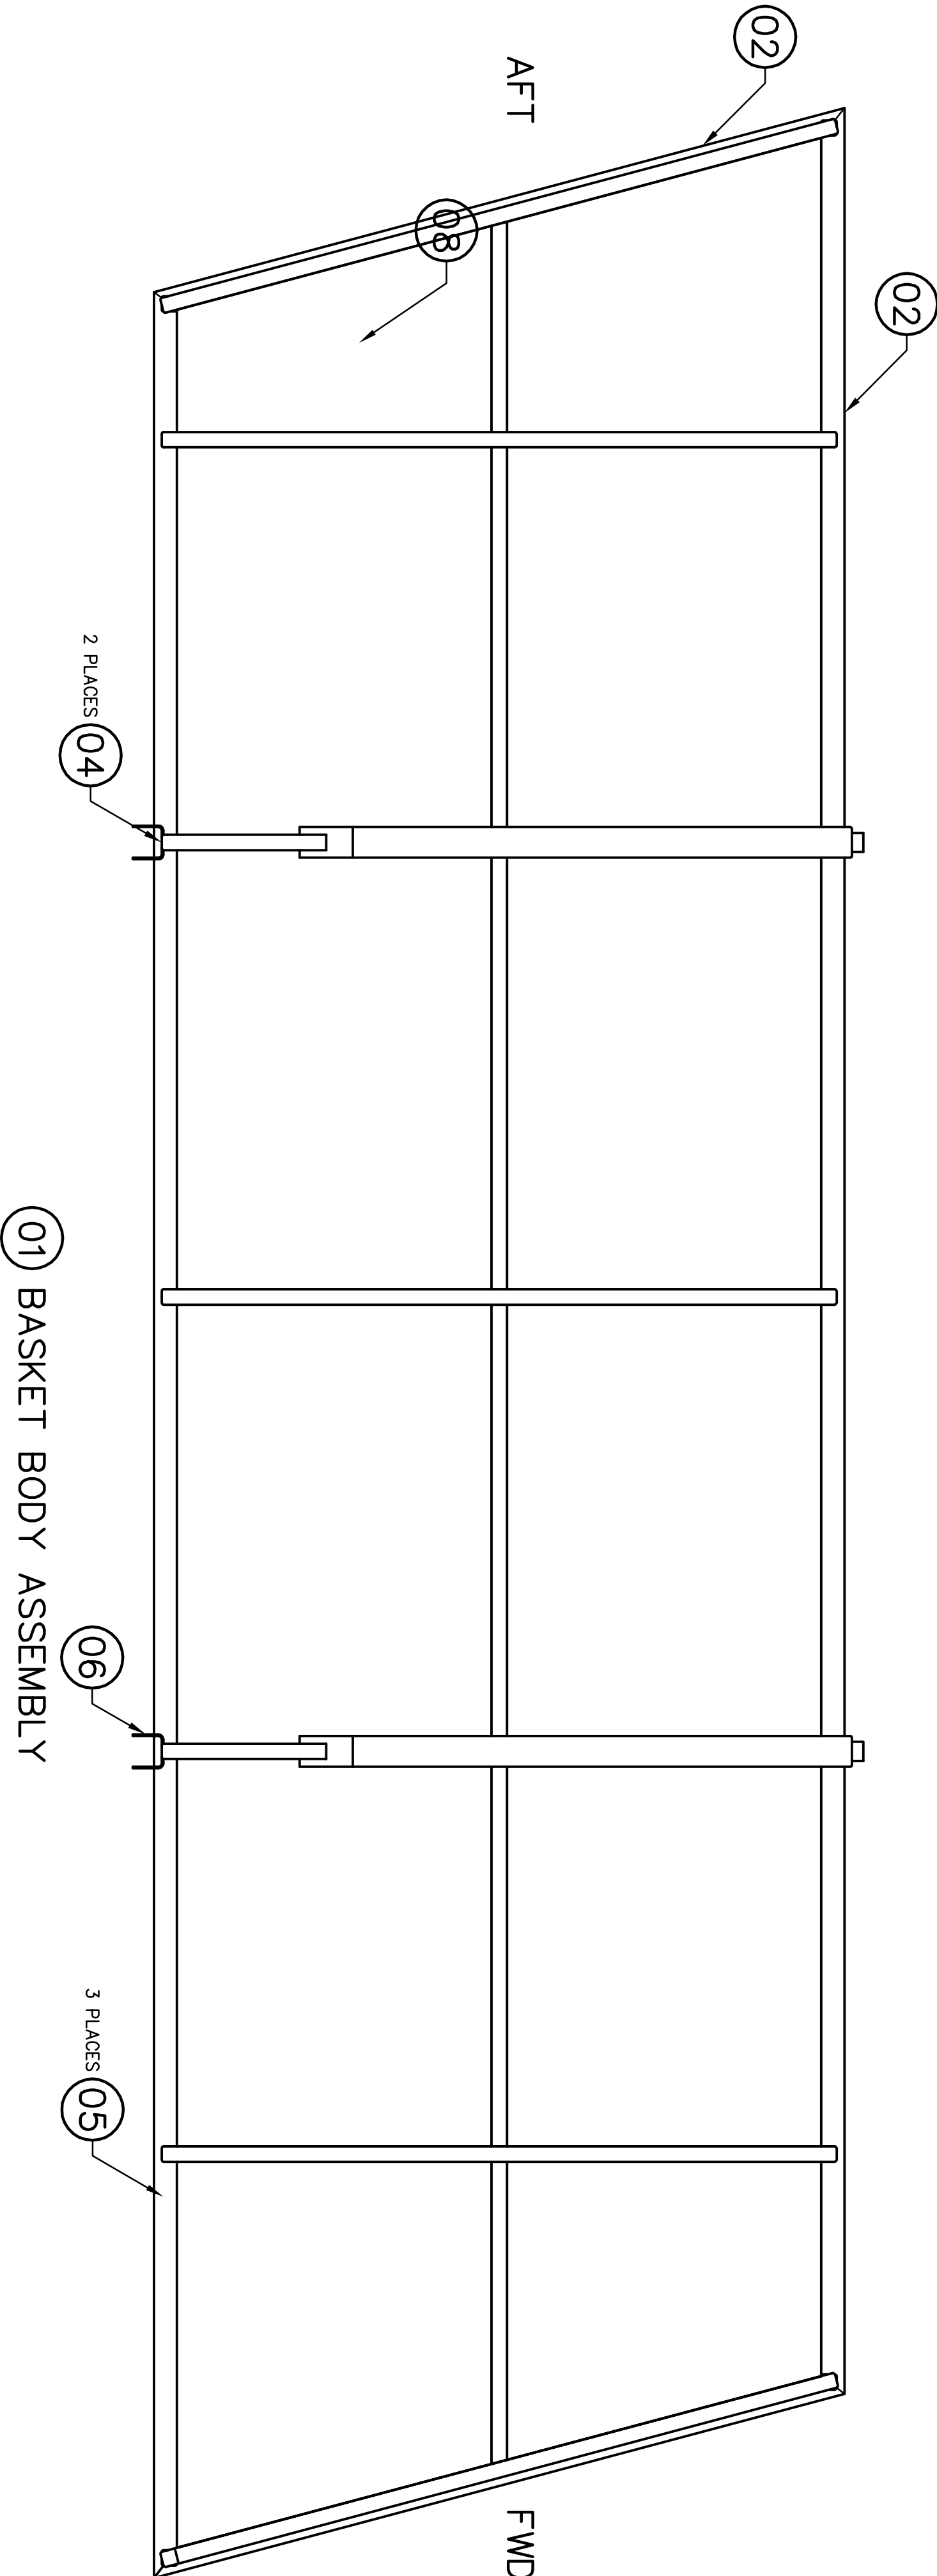


- NOTES:
1. REMOVE ALL BURRS AND BREAK SHARP EDGES
 2. WELDING OF 4130 STEEL TO BE COMPLETED BY GTAW METHOD TO AMS 2685C. WELDING ROD SHALL CONFORM TO ER70S-2 OR EQUIVALENT.
 3. WHEN ASSEMBLY IS COMPLETE, FILL ALL VENT HOLES WITH ROSETTE WELD.
 4. THOROUGHLY CLEAN AND POWDER COAT BASKET SUB-ASSEMBLIES PRIOR TO ASSEMBLY.

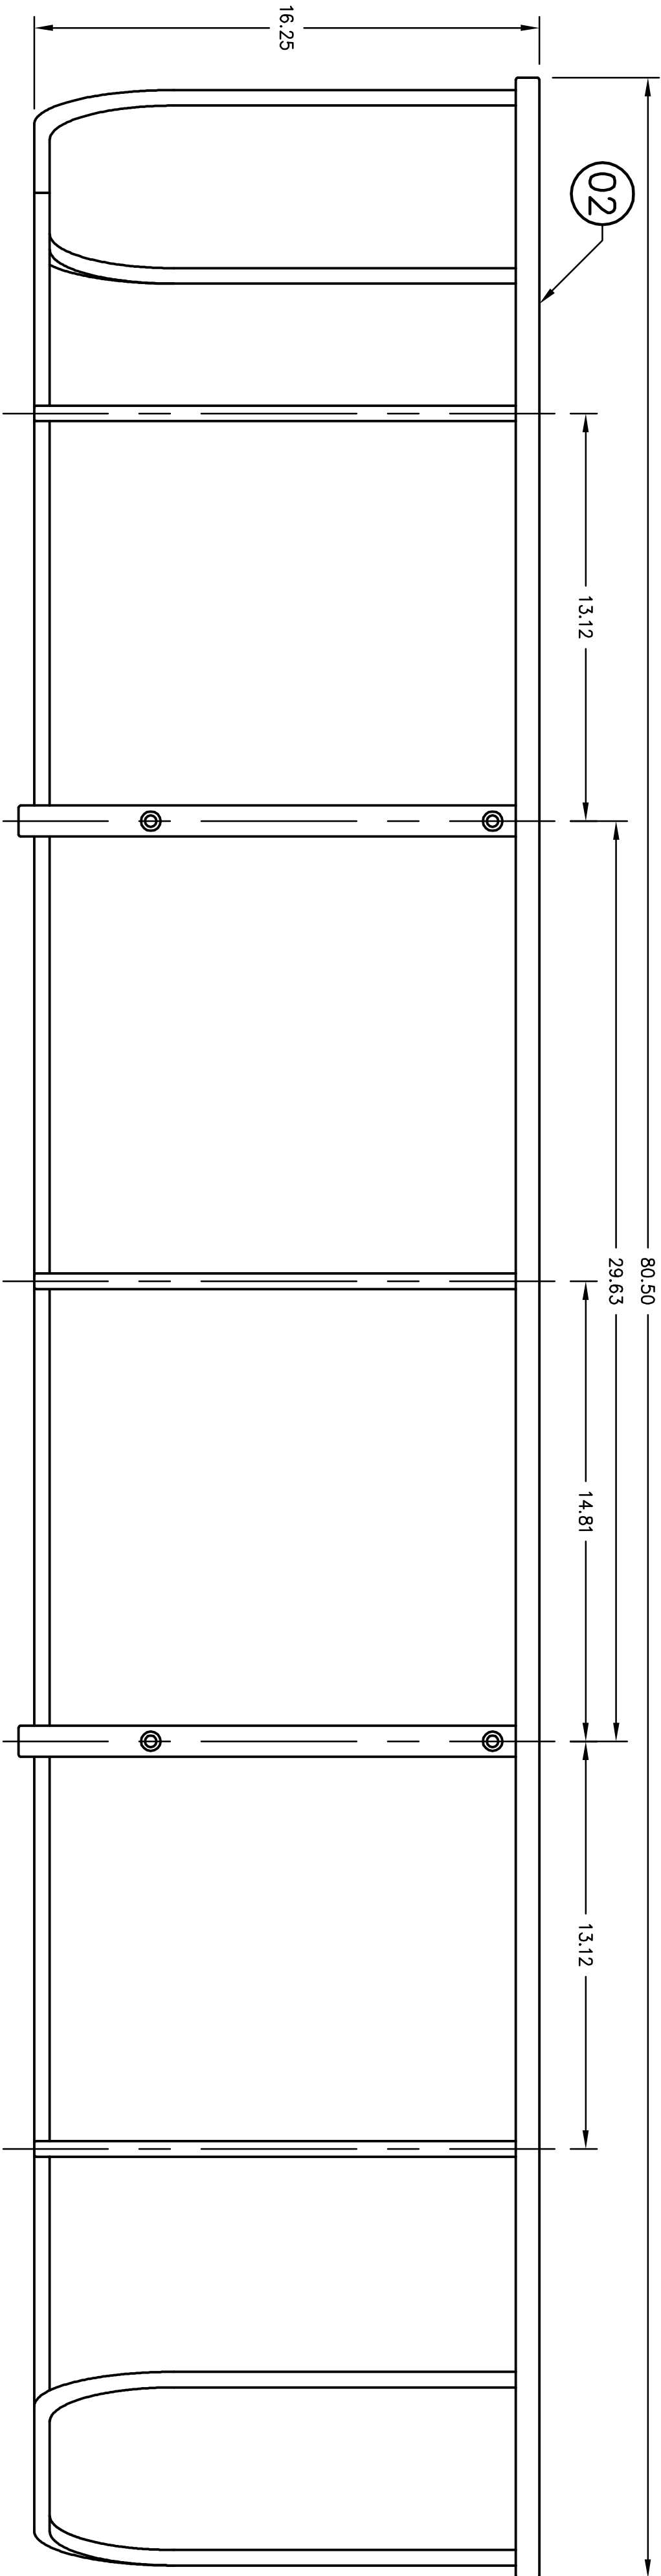

01 BASKET BODY ASSEMBLY

APPROVALS		DATE	AERO DESIGN LTD. CONSULTING ENGINEERS, TRANSPORT CANADA APPROVALS, DAR 290M 2013 - 38TH AVENUE N.E., CALGARY, ALBERTA, CANADA, T2E 6R7 tel: (403) 250-8027 fax: (403) 250-8933 aerodesign@telusplanet.net		
DRAWN:	JEFF CLARKE	27 AUG 2009			
CHECKED:	E. BURGIN				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DECIMALS ANGLES X.XXX ±0.010 X.XX ±0.03 X.X ±0.1					
SCALE 1 : 4			DWG. SIZE	DWG. NO.	REV.
SHEET 1 OF 1			A1	82841	0